




$\underline{1...2...3...4...5...6...7...8...9...10} \ \underline{SECONDS!}$ "There is no quicker, more cost effective, and easier way to terminate guy wire."







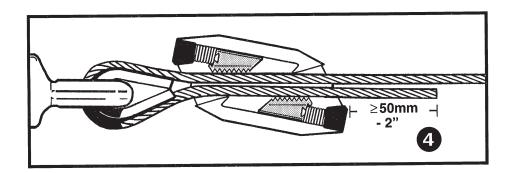

ROHN Gripple are available for the following guy wire:

- 620, 618, and 1/8HSCC for guyed telescoping masts and tubing
- 3/16EHS and 1/4EHS 3/16" and 1/4" guy wire

The Gripple replaces the need for a turnbuckle and cable clamp. (It is not designed to suspend or lift persons).

Properly installed Gripple Rope Gripps provide approximately 85% of the nominal breaking strength of the steel cable to which they are applied. To determine the actual holding strength of the Gripple, a pull test must be made. This will determine if the Gripple is suitable for your application. Use appropriate safety factor when calculating working load limit. Gripple Rope Gripps are not to be used in a load lifting capacity.

Part #	ROHN Guy Wire	Bag Quantity
61820GRPL	620 618 1/8HSCC	10
3/16Gripple	3/16EHS	8
1/4Gripple	1/4EHS	8