



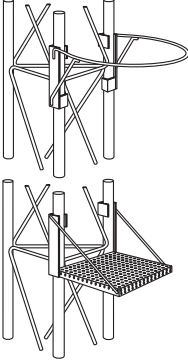


	<p>Guy Bracket GA45GD</p> <p>Torque Bars TB45D (not shown) Also available. Requires three 3/8S shackles for installation.</p>		<p>Side Arm Bracket SA253UA</p>
	<p>Torque Arm Stabilizer Assembly TA45 Shown with 45TDM2 Top Dish Mount</p>		<p>Face Dish Mount DM45G2 2-3/8" O.D. 5' long</p> <p>DM454 4-1/2" O.D. pipe 5' long also available.</p>
	<p>455ACL3 Bolt-on sheets to provide anti-climb protection.</p>		<p>Safety Ring SR245</p> <p>Work Platform WP45G</p>
	<p>Erection Fixture EF2545 2-1/2" sheave with 3/8" I.D. groove.</p> <p>Note: Erection fixtures are for lifting one 10' section at a time and are not intended for the lifting of personnel.</p>		<p>Tower Bushing TB50 1-1/4" I.D. x 2" O.D. For use in 45AG top section.</p> <p>TP75 Also available 1-1/2" I.D. x 2" O.D.</p>