





Chain, Rope and Cable



Description	Part Number	Weight
Chain, 1/2" with 2 clevis hooks, 10' long	ETCHN1/2	10
Manila rope, 3 strand, lubricated 3/8", tensile strength 1,220 lbs.		
600' coil	ETMR3/8X600	24
1,200' coil	ETMR3/8X1200	48
1/2", tensile strength 2,830 lbs.		
600' coil	ETMRI/2X600	44
1,200' coil	ETMRI/2X1200	88
5/8", tensile strength 3,960 lbs		
600' coil	ETMR5/8X600	79
1,200' coil	ETMR5/8X1200	157
Polypropolene rope 3/8", tensile strength 2,440 lbs.		
600' coil	ETPR3/8X600.	23
1,200' coil	ETPR3/8X1200	46
1/2", tensile strength 3780 lbs.		
600' coil	ETPR1/2X600	42
1,200' coil	ETPR1/2X1200	84
5/8", tensile strength 5,670 lbs.		
600' coil	ETPR5/8X600	50
1,200' coil	ETPR5/8x1200	100
Winch cable		
1/8", 2,000 lb. breaking strength	ETWC18	.06/FF
1/4", 5,880 lb. breaking strength	ETWC14	.12/FF
3/8,13, 120 lb. breaking strength	ETWC38	.25/FF

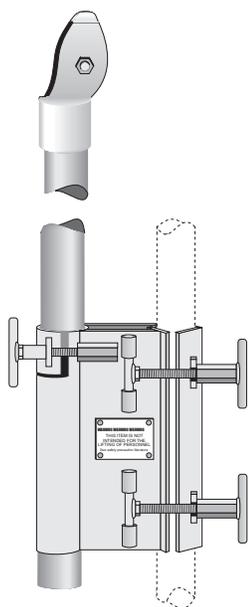

Erection Fixtures

Description	Part Number	Weight
12' for towers with 1-1/4" tubular side rails	EF2545	20

Important: Erection fixtures should only be used to raise one section, or any part of a section, at one time. They are not intended for the lifting of people.