





ID#	M	N	R
ABL61	12' 11"	11' 2 1/4"	7' 5 1/2"
ABL62	14' 11"	12' 11"	8' 7 3/8"
ABL63	16' 10 1/4"	14' 7 3/16"	9' 8 3/4"
ABL64	18' 10 1/4"	16' 3 15/16"	10' 10 5/8"
ABL65	20' 10 3/8"	18' 0 13/16"	12' 0 9/16"
ABL66	22' 10 3/8"	19' 9 5/8"	13' 2 7/16"
ABL67	24' 10 3/8"	21' 6 3/8"	14' 4 1/4"
ABL68	8' 9 1/2"	7' 7 3/8"	5' 0 15/16"
ABL69	10' 9 1/2"	9' 4 1/8"	6' 2 3/4"
ABL610	12' 9 1/2"	11' 0 15/16"	7' 4 5/8"
ABL611	15' 0 1/2"	13' 0 5/16"	8' 8 3/16"
ABL612	17' 6 1/2"	15' 2 5/16"	10' 1 9/16"
ABL613	20' 6 1/2"	17' 4 1/4"	11' 6 7/8"
ABL614	22' 6 1/2"	19' 6 1/4"	13' 0 3/16"
ABL615	25' 0 1/2"	21' 8 1/4"	14' 5 1/2"
ABL616	27' 6 1/2"	23' 10 1/4"	15' 10 13/16"
ABL617	30' 0 1/2"	26' 0 3/16"	17' 4 1/8"
ABL618	32' 6 1/2"	28' 2 3/16"	18' 9 7/16"
ABL619	36' 3 1/2"	31' 5 3/16"	20' 11 7/16"
ABL620	40' 0 1/2"	34' 8 1/8"	23' 1 7/16"
ABL621	43' 9 1/2"	37' 11 1/8"	25' 3 3/8"
ABL622	14' 9 1/4"	12' 9 1/2"	8' 6 5/16"
ABL623	20' 9 3/8"	17' 11 15/16"	12' 0"
ABL624	17' 5 1/2"	15' 1 7/16"	10' 0 15/16"
ABL625	18' 9 1/4"	16' 3 1/16"	10' 10 1/16"
ABL626	22' 9 3/8"	19' 8 3/4"	13' 1 13/16"
ABL627	32' 5 1/2"	28' 1 5/16"	18' 8 7/8"
ABL628	24' 9 3/8"	21' 5 9/16"	14' 3 11/16"
ABL629	16' 9 1/4"	14' 6 5/16"	9' 8 3/16"
ABL630	14' 11 1/2"	12' 11 7/16"	8' 7 5/8"
ABL631	12' 9"	11' 0 1/2"	7' 4 5/16"
ABL632	14' 10"	12' 10 1/8"	8' 6 3/4"
ABL633	12' 10"	11' 1 3/8"	7' 4 15/16"
ABL634	6' 11"	5' 11 7/8"	3' 11 15/16"

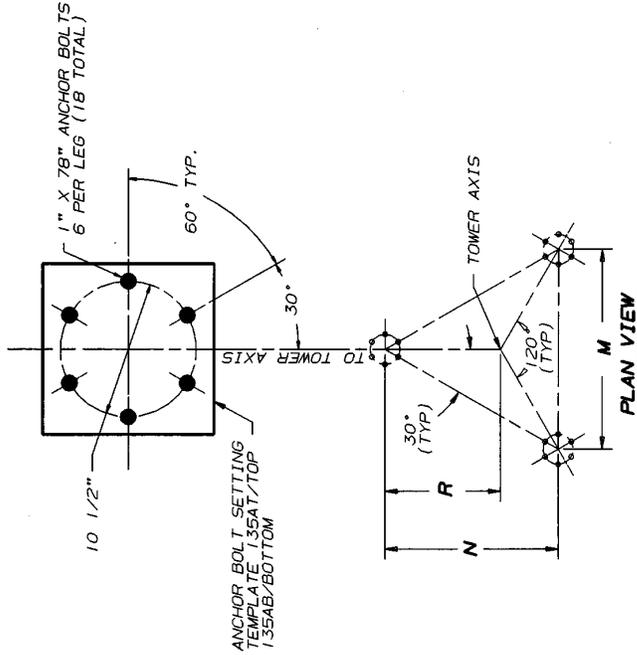

**ANCHOR BOLT PROJECTION**

NO.	REVISION DESCRIPTION	DATE	BY	CHKD BY	DATE
R3	ADDED ABL630-ABL634	12/18/98	PJD	TKM	TS
R2	REVISED NOTE 2 AND ADDED ABL627-ABL629	6/8/90	WEB	WJU	TS
R1	REV. D. PLAN VIEW ADDED ID NO'S, ABL622-ABL625	4/14/89	KTL	RKB	TS

THIS DRAWING IS THE PROPERTY OF ROHN. IT IS NOT TO BE REPRODUCED, COPIED OR TRACED IN WHOLE OR IN PART WITHOUT OUR WRITTEN CONSENT.

Scale:	None	By:	Date:	Title:
Drawn:	WJU	6/15/99		
Checked:	KTL	7-21-99		
App. Eng.:	TS	7-29-99		
App. Svc.:	AE	7-29-99		

**6 HOLE ANCHOR BOLT LAYOUT**

DRAWING NO.: **C880726 R3**

**NOTES**

- FOR ANCHOR AND FOUNDATION TOLERANCES REFER TO THE LATEST REVISION OF DWG. NO. ABL0214.
- ALL ANCHOR BOLTS SHALL MEET OR EXCEED REQUIREMENTS OF ASTM A354-GR BC AND ARE HOOKED 180° AT THE BOTTOM.
- WHEN FOUNDATIONS ARE DESIGNED BY OTHERS, IT SHALL BE THE RESPONSIBILITY OF THE PURCHASER'S FOUNDATION ENGINEER TO INSURE THAT THE ANCHORAGES PROVIDED ARE COMPATIBLE WITH THE PROPOSED FOUNDATION DESIGNS AND THAT THE CAPACITIES OF THE ANCHORAGES ARE NOT LIMITED BY THE STRENGTH OF THE FOUNDATIONS.
- FOR ANCHOR BOLT TEMPLATE DETAILS SEE DRAWING B730521